

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015206 A2

- (51) International Patent Classification⁷: **E02D 3/039**, 3/032
- (21) International Application Number: PCT/IB2003/003147
- (22) International Filing Date: 5 August 2003 (05.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002/6213 5 August 2002 (05.08.2002) ZA
- (71) Applicant and
(72) Inventor: **SILCOCK, Daniel, Paul** [ZA/ZA]; 308 Bellerive, 6 David Place, 1609 Dowerglen (ZA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): **GEOGHEGAN, Kieron, Mark** [ZA/ZA]; 3A Donne Avenue, Senderwood, 2145 Bedfordview (ZA).
- (74) Agent: **JOHN & KERNICK**; P.O. Box 3511, Halfway House, 1685 Midrand (ZA).

(54) Title: A REFUSE COMPACTOR

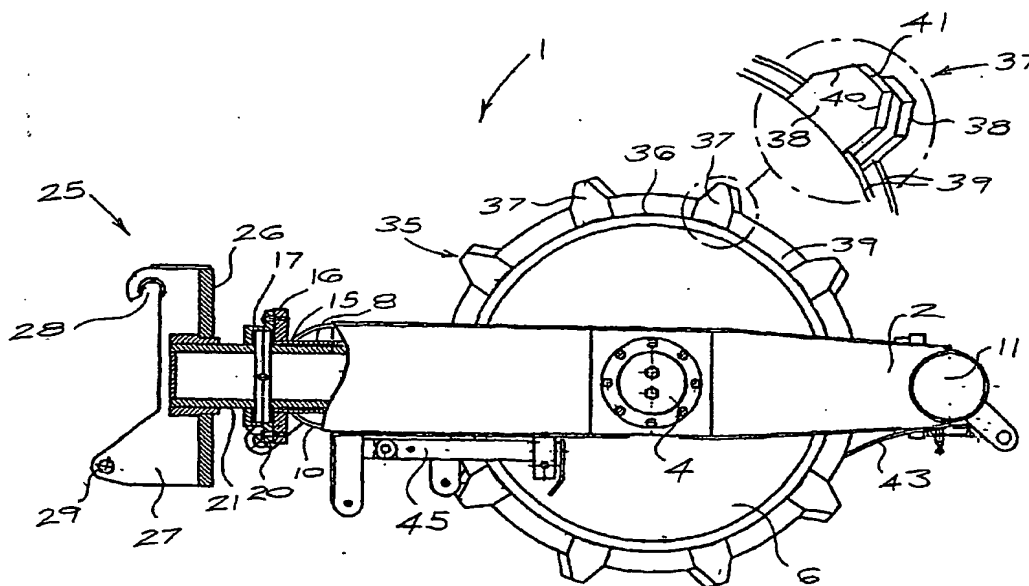

(57) Abstract: This invention relates to apparatus for use in compacting refuse and comprises at least one roller secured to a chassis having a coupling for releasably securing the chassis to a boom of a front-end loader. The invention extends to a cleat for a roller which is formed from two halves offset from each other along a circumference of the roller.

WO 2004/015206 A2